

TF 115P-002

40° F to 110° F

4° C to 43° C



TF115P-002

Industrial grade

PECO TF115 **NEMA 4x** with Accessory Cord Set

Fast, easy & portable temperature control at a specific location. Industrial application thermostat that is built for long-term, reliable performance while withstanding harsh climate conditions.

Simple plug-in set up,

plug into device power source.

Easy configuration for heating or cooling,

makes portable use easy.

Rugged, weather resistant enclosure,

enabling placement most anywhere.

Tolerates moist conditions,

performs despite water spray, high humidity, airborne contaminants & moderately corrosive conditions.

Large, visible dial,

making set point temperatures clear.

Enclosures comply with N.E.C. Article 547,

giving code compliance peace-of-mind.

Built from corrosion resistant materials,

allowing long life & reliable performance in most demanding climates.

Wide Range of Industrial Functions

Typical applications are anywhere a rugged, weatherproof mechanical thermostat will best control industrial heating/cooling or staged heat/cool/ventilation systems.

- ▶ Greenhouses
- ▶ Garages
- ▶ Warehouses
- ▶ Factory & industrial buildings
- ▶ Animal confinement buildings, including those for poultry or livestock.
- ▶ Fans
- ▶ Dampers



Innovation & experience you can count on




TF 115 P

Specifications

| | |
|-----------------------------|---|
| Temp. Control Range | 40° to 110° F (4° to 43° C) |
| Differential | 3° F (1.7°C) |
| Maximum Ambient Temperature | 140° F (60°C) |
| Voltage Rating | 120 VAC |
| Inductive | FLA - 4.4 LRA - 26.4 |
| Resistive AMPS | 13 |
| Pilot Duty | 125 VA |
| Dimensions | 3.1" x 7" x 2.5" 7.7 cm x 17.8 cm x 6.4 cm |
| Line cord length | 72" (6-feet) 183 cm (1.83 m) |
| Weight | 0.88 lbs. |


Suitable for 24 VAC operation

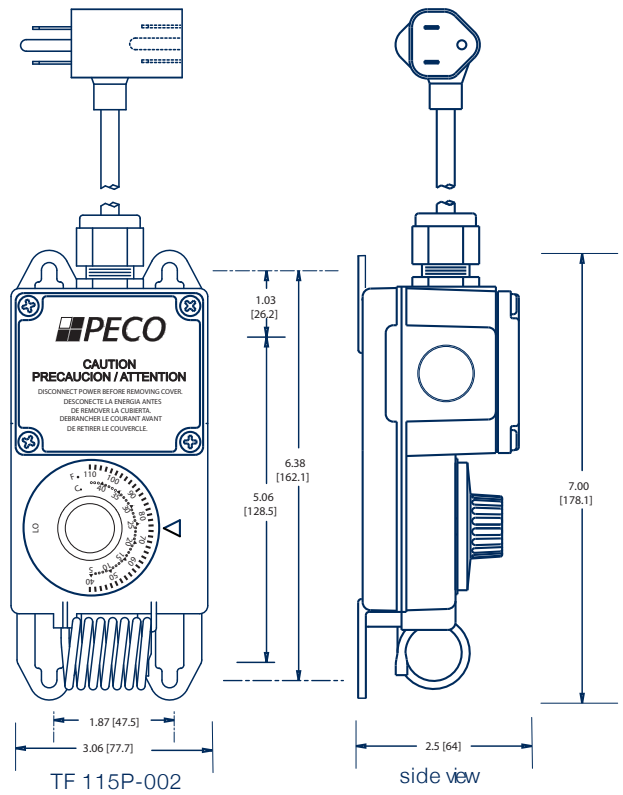

Technical Data


Wiring

Cooling

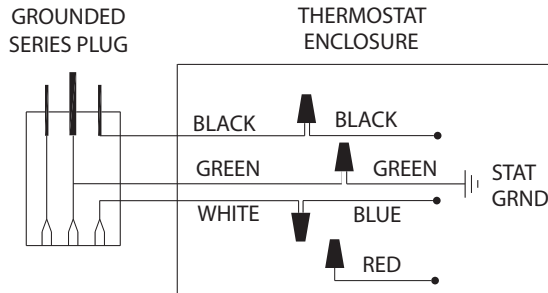

TF115P-002 factory wire-configuration is cooling control.

Heating

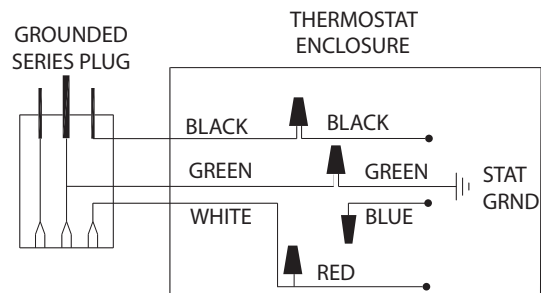

Thermostat wiring should be re-configured for heating control.

Ordering Information

| Model | Part No. | Temp. Range | Diff. | Dimensions | Switch Action | Bulb |
|------------|----------|-----------------|-----------|------------------------|---------------|------------------------|
| TF115P-002 | 170726 | 40° F to 110° F | Fixed 3 F | 3.1" W x 7" H x 2.5" D | SPDT | Coiled Air - Stainless |